

KML-450MWH

LOW-PROFILE MODULAR CRESCENT CUBER

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

KML-450MWH


9/06

Item # 13206


CUBER DIMENSIONS

W x D x H

KML-450MWH
30 x 27^{3/8} x 22



B-250



B-500



DB-200




Also available on
Bins:
B-700PF/SF
B-800PF/SF
B-900PF/SF

Large Bins:
B-1150SS
B-1300SS
B-1500SS
B-1650SS

KML-450MWH

Water-Cooled
Shown on an optional
B-500



- Up to 433 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Individual crescent cube
- Protected by *HoshiGuard* Antimicrobial Agent 
- CycleSaver® Design 
- EverCheck® alert system 
- Stainless steel evaporator
- Removable air filters (Air-cooled model only)
- R-404A Refrigerant



Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts & Labor on: Evaporator.

Five Year - Parts on: Compressor, air-cooled condenser coil.



KML-450MWH LOW-PROFILE MODULAR CRESCENT CUBER

DIMENSIONS
W x D x H
KML-450MWH
30 x 27^{3/8} x 22

• Water-cooled

WATER-COOLED

Water Temp° F.	50°	70°	90°	
Air Temp° F.	70°	433	428	402
80°	429	422	385	
90°	428	417	384	

UTILITY CONSUMPTION



Model Number	Ice Production Per Cycle		KWH per 100 LBS. 90/70	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KML-450MWH	6.6	360	6.1	27.1	130

SPECIFICATIONS


Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KML-450MWH	Water-Cooled	10.0	15	185 lbs.

STORAGE BINS

Model Number	Application Capacity	ARI-Rated Capacity
B-250	250 lbs.	230 lbs.
B-500	500 lbs.	360 lbs.
B-700	700 lbs.	550 lbs.
B-800	800 lbs.	600 lbs.
B-900	900 lbs.	660 lbs.
B-1150	1150 lbs.	N/A
B-1300	1275 lbs.	N/A
B-1500	1490 lbs.	N/A
B-1650	1605 lbs.	N/A

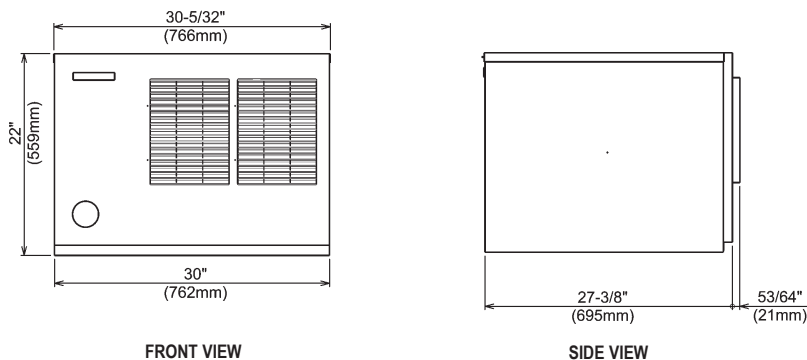

ICE DROP ZONE

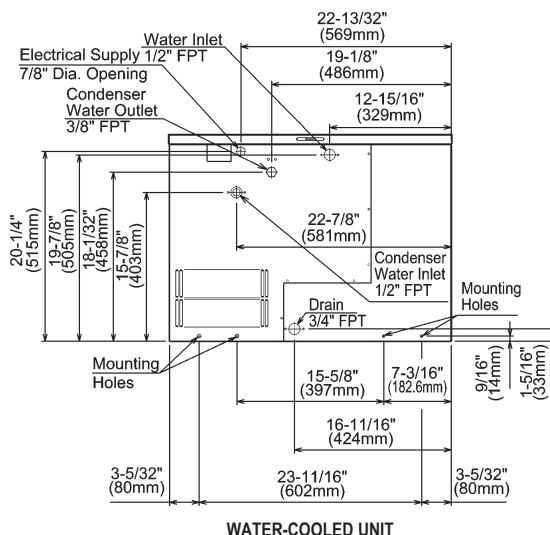

WATER-COOLED UNIT

ELECTRICAL & PLUMBING/KML-450MWH

- 115/60/1
- 20 Amp Max Fuse/HACR Breaker Size
- 1/2" OD copper or equivalent independent potable water supply
- 3/4" FPT independent drain connection

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

